

Smart Spot

Revolving door Laser Safety Sensor




Features

- Laser spot detection height of Max.10 meters.
- The minimum ground blind area is 5cm.
- The distance accuracy is 1cm.
- It can be with or without background.
- The detection distance does not drift.
- Mobile phone AP setting parameters.



Advantages

- IP65 rated, no need to open the cover for debugging.
- The minimum 5 cm blind area, covering pet anti-pinch.
- There are two ways of fixed/mobile, and the distance does not drift.
- Set parameters through the APP to simplify the debugging process.
- It can light up the visible light spot to intuitively indicate the position.

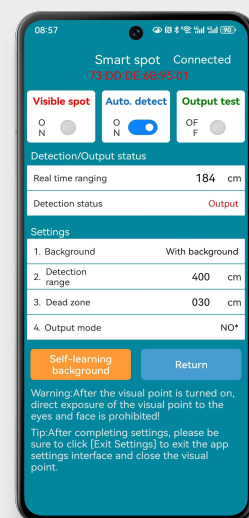

Google Play




Revolving Door Products
Smart Spot

Smart Spot


Revolving door Laser Safety Sensor

Parameters

Detection range	Human eye safety
0-10m	Class1(IEC60825)
Accuracy	FOV
±5cm @(0.2m~3m)	2°
±2% @(3m-10m)	
Range resolution	Power supply
1cm	12-36V AC/DC
Operating temperature	Average current
-30°C~60°C	≤70mA
Protection class	Consumption
IP65	≤0.35W
Light source	Peak current
VCSEL	150mA
Central wavelength	Output
850nm	48VACDC,100mA
Housing material	Dimension
ABS	143.5mm x 42mm x 45mm
Cable length	Weight
20cm quick plug+2.8m	200g

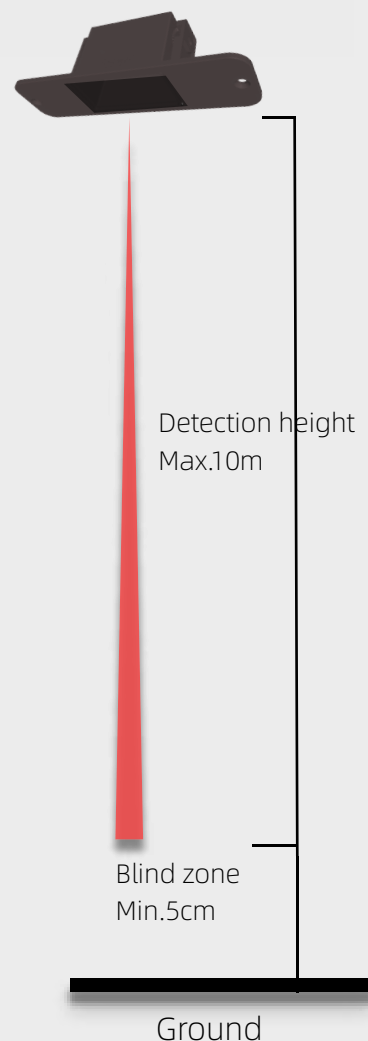


Wirings

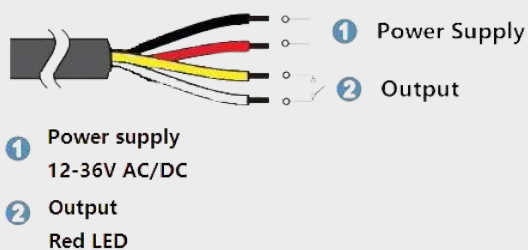

Dimensions

Unit (mm)

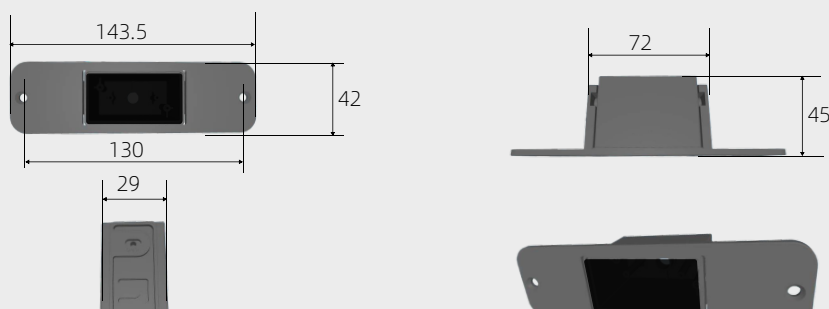

Giants Sensor Technology